





# Antenna

(1109- ) from 201109.

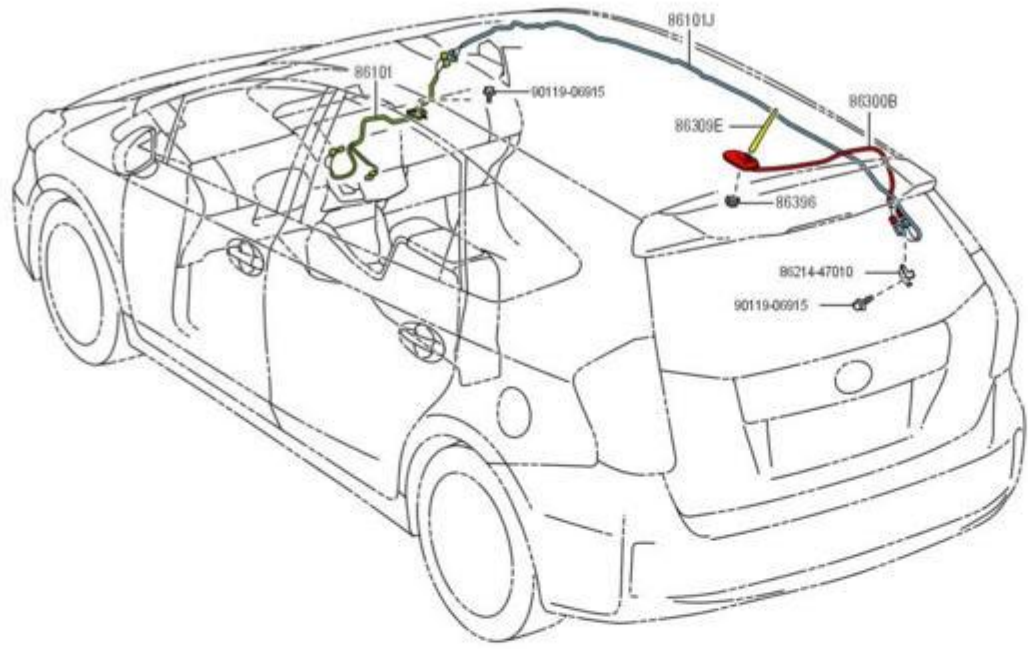

864499

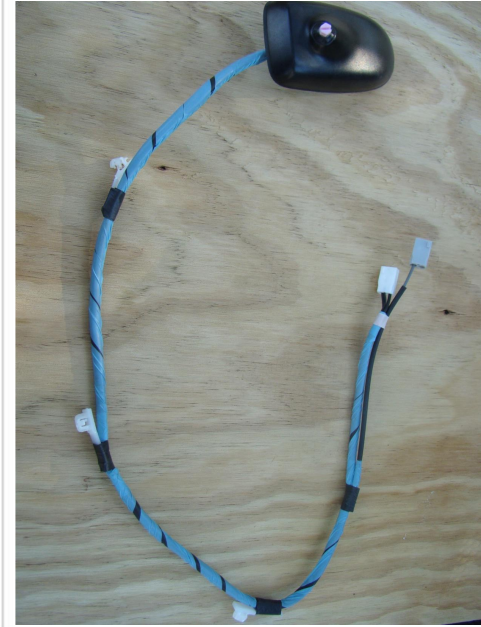

Showing Genuine Parts that fit your: 2012 Toyota Prius V 1800CC 16-VALVE DOHC EFI, AUTOMATIC, ATM STEPLESS

[Change Vehicle](#)


Standard Radio No Satellite or Safety Connect

86300B	<u>ANTENNA ASSEMBLY, AMPLIFIER, No.1. ANTENNA ASSY, AMPLIF</u> PRIUS V (ZVW41)	<a href="#">▶ 8630047090</a>	\$130.39 <b>\$97.20</b>
86300B	<u>ANTENNA ASSEMBLY, AMPLIFIER, No.1. ANTENNA ASSY, SATELL: AUDIO-AVN 8SPE...</u> PRIUS V (ZVW41)	<a href="#">▶ 8696047031</a>	\$229.46 <b>\$165.54</b>
86300B	<u>ANTENNA ASSEMBLY, AMPLIFIER, No.1. ANTENNA ASSY, TELEPH: AUDIO-AVN 8SP...</u> PRIUS V (ZVW41); USA	<a href="#">▶ 8676047031</a>	\$269.11 <b>\$194.15</b>

With Safety Connect Cellular "May Day"


With Satellite Radio

1. Remove all Back Foam Panels
2. Remove 12v Battery Cover Panel (not shown here)
3. Remove Panel over HV Battery to Back Seat "Rear #1 Floor Board" (One 10mm bolt and Clips)
4. Remove "Back Door Scuff Plate" at Rear Hatch
5. Remove Right Rear Door Scuff Plate
6. Remove Rear "Right Seat Outer Belt" 22mm on Floor
7. Remove Lower Right "Deck Trim Side Panel" and "Trim Panels" on same (two – one covers bolt and the other is the 12v outlet) (Two 10mm bolts –and Clips) (Remove Third 10 mm bolt if equipped with Cargo Net)
8. Remove Upper Right Panel with Clips
9. Remove Upper Right Small Window Panel "Rear Roof Side Rail" with Clips
10. Remove three Exposed Push Clips holding Headliner in back
11. Partially Pull Headliner Down until Antenna Base Nut and Cables are Accessible
12. Remove Antenna Connectors first then Cable Retainers starting at Connector End.
13. Remove Base Nut and depress built in retainer hooks to remove. (See new part for clarity)

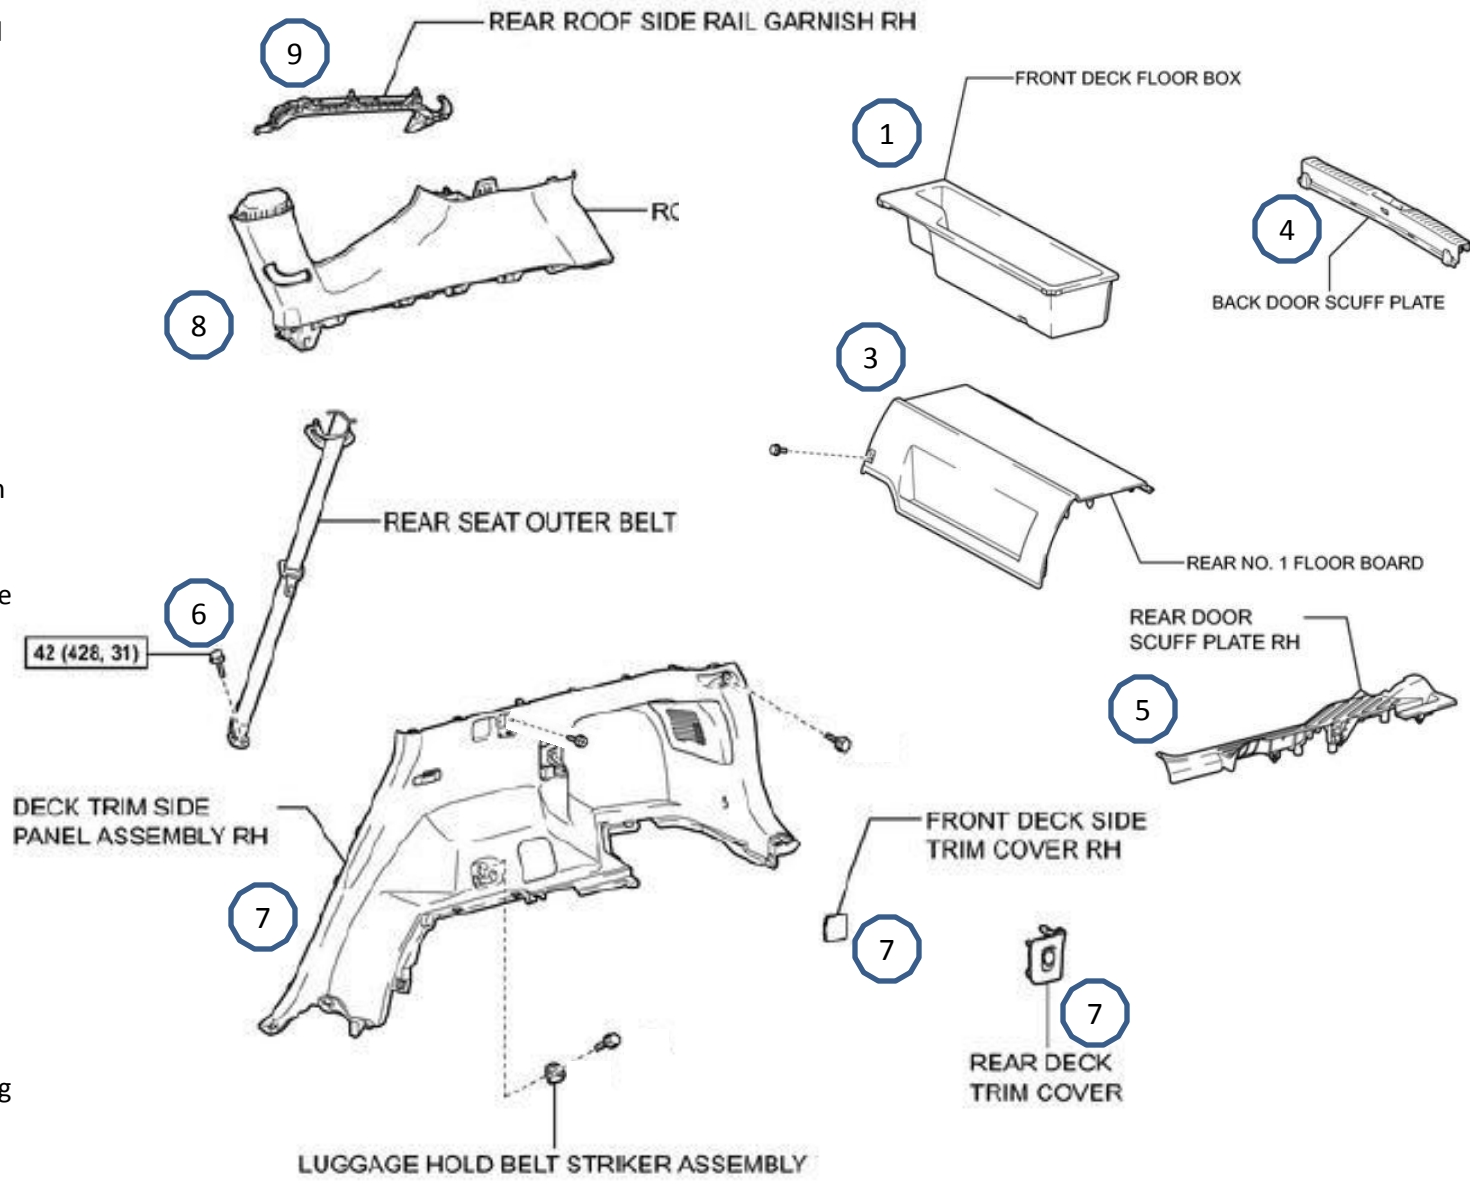

**l'm (kgf\*cm, ft.\*lbf):** Specified torque




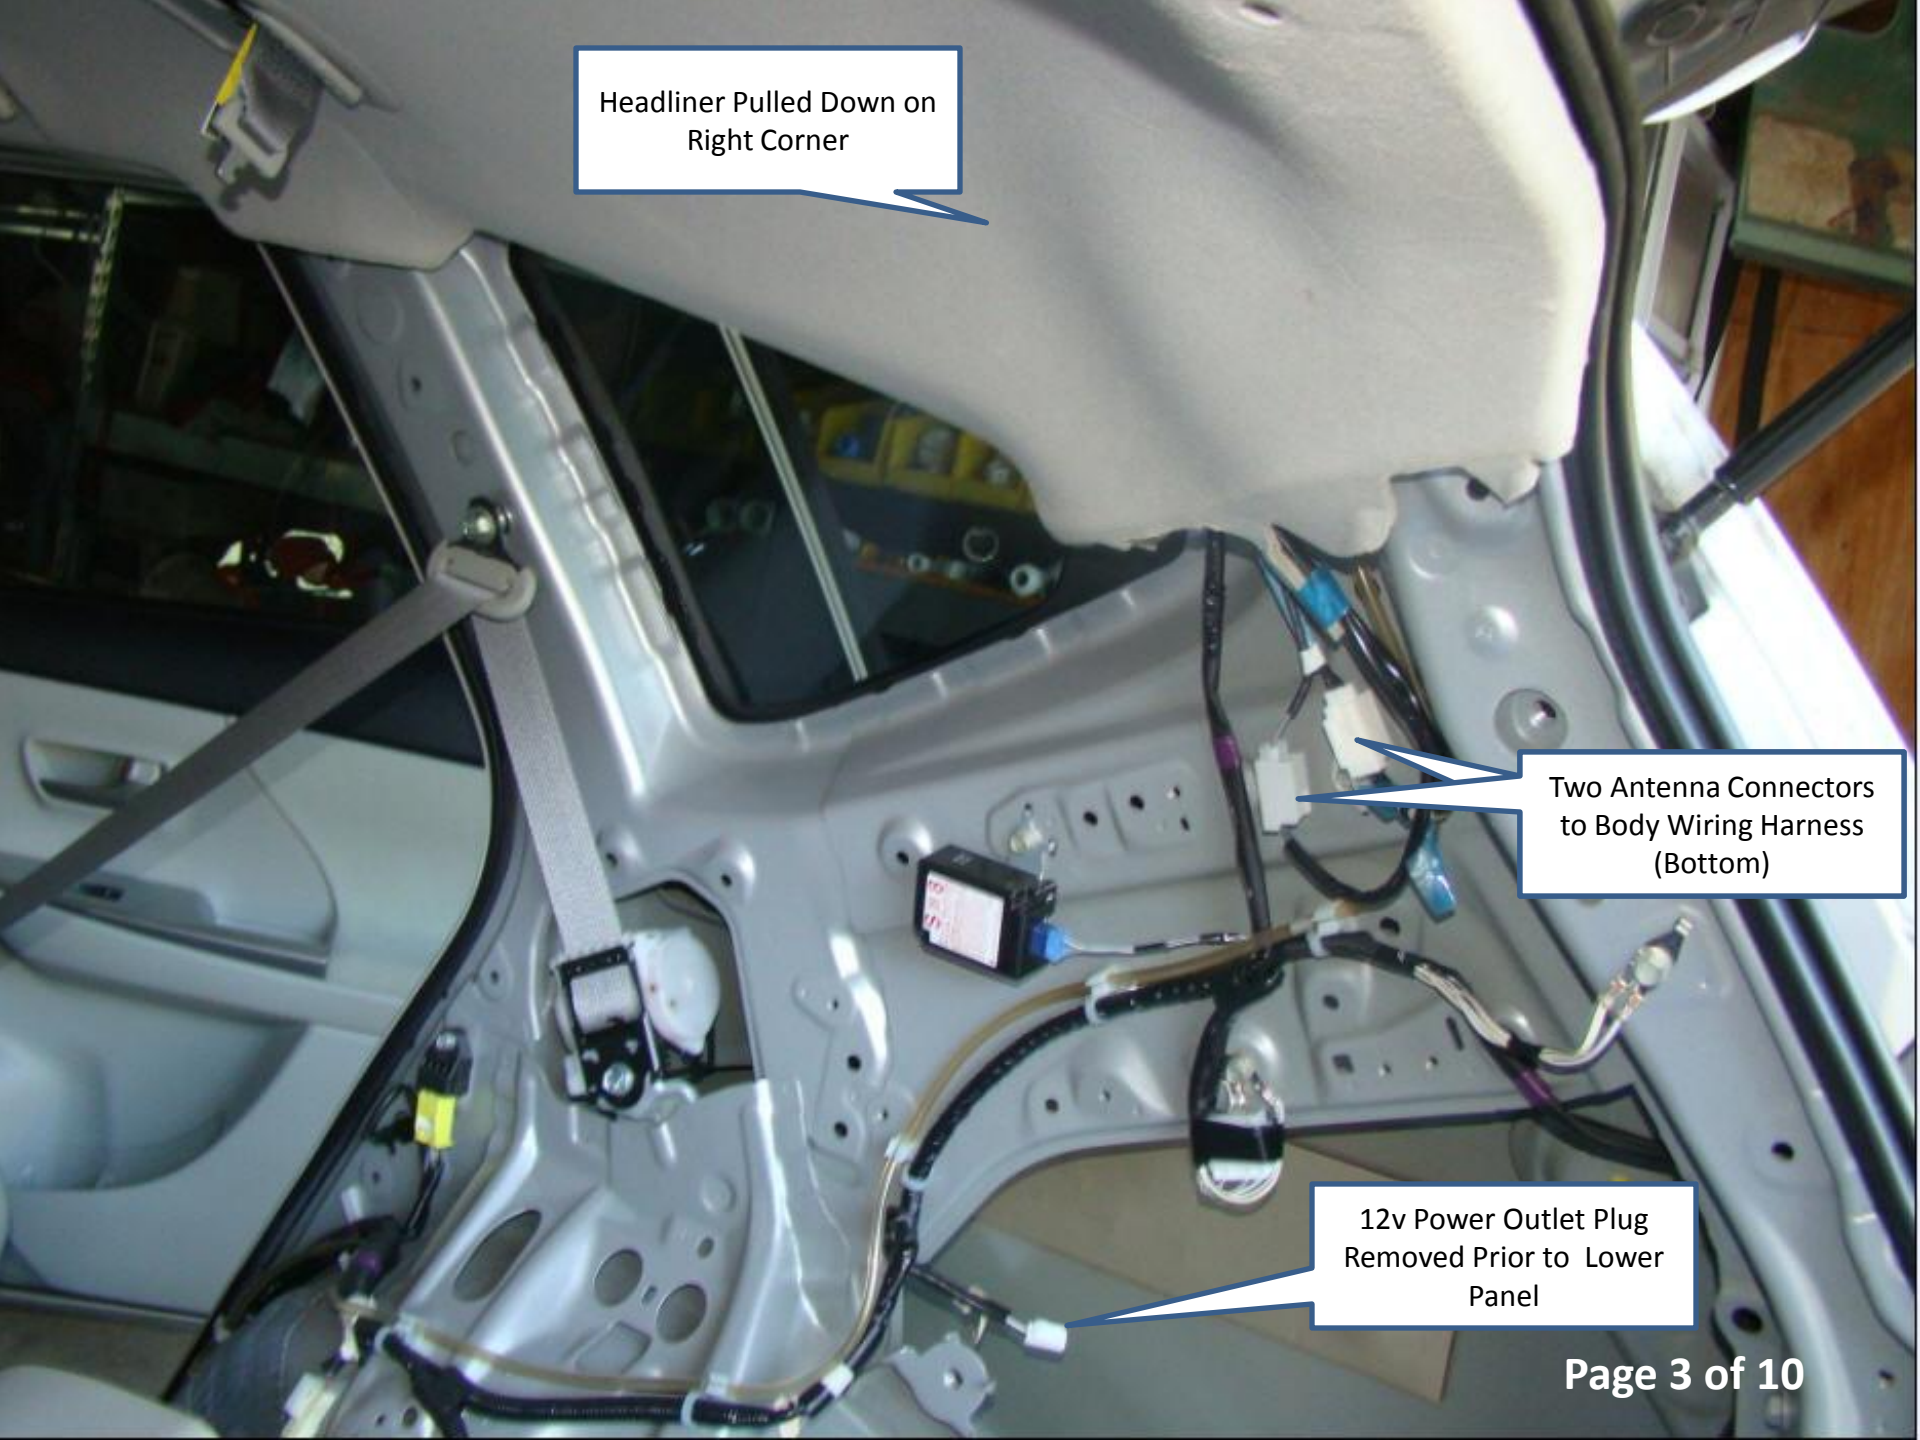

Headliner Pulled Down on  
Right Corner

Two Antenna Connectors  
to Body Wiring Harness  
(Bottom)


12v Power Outlet Plug  
Removed Prior to Lower  
Panel

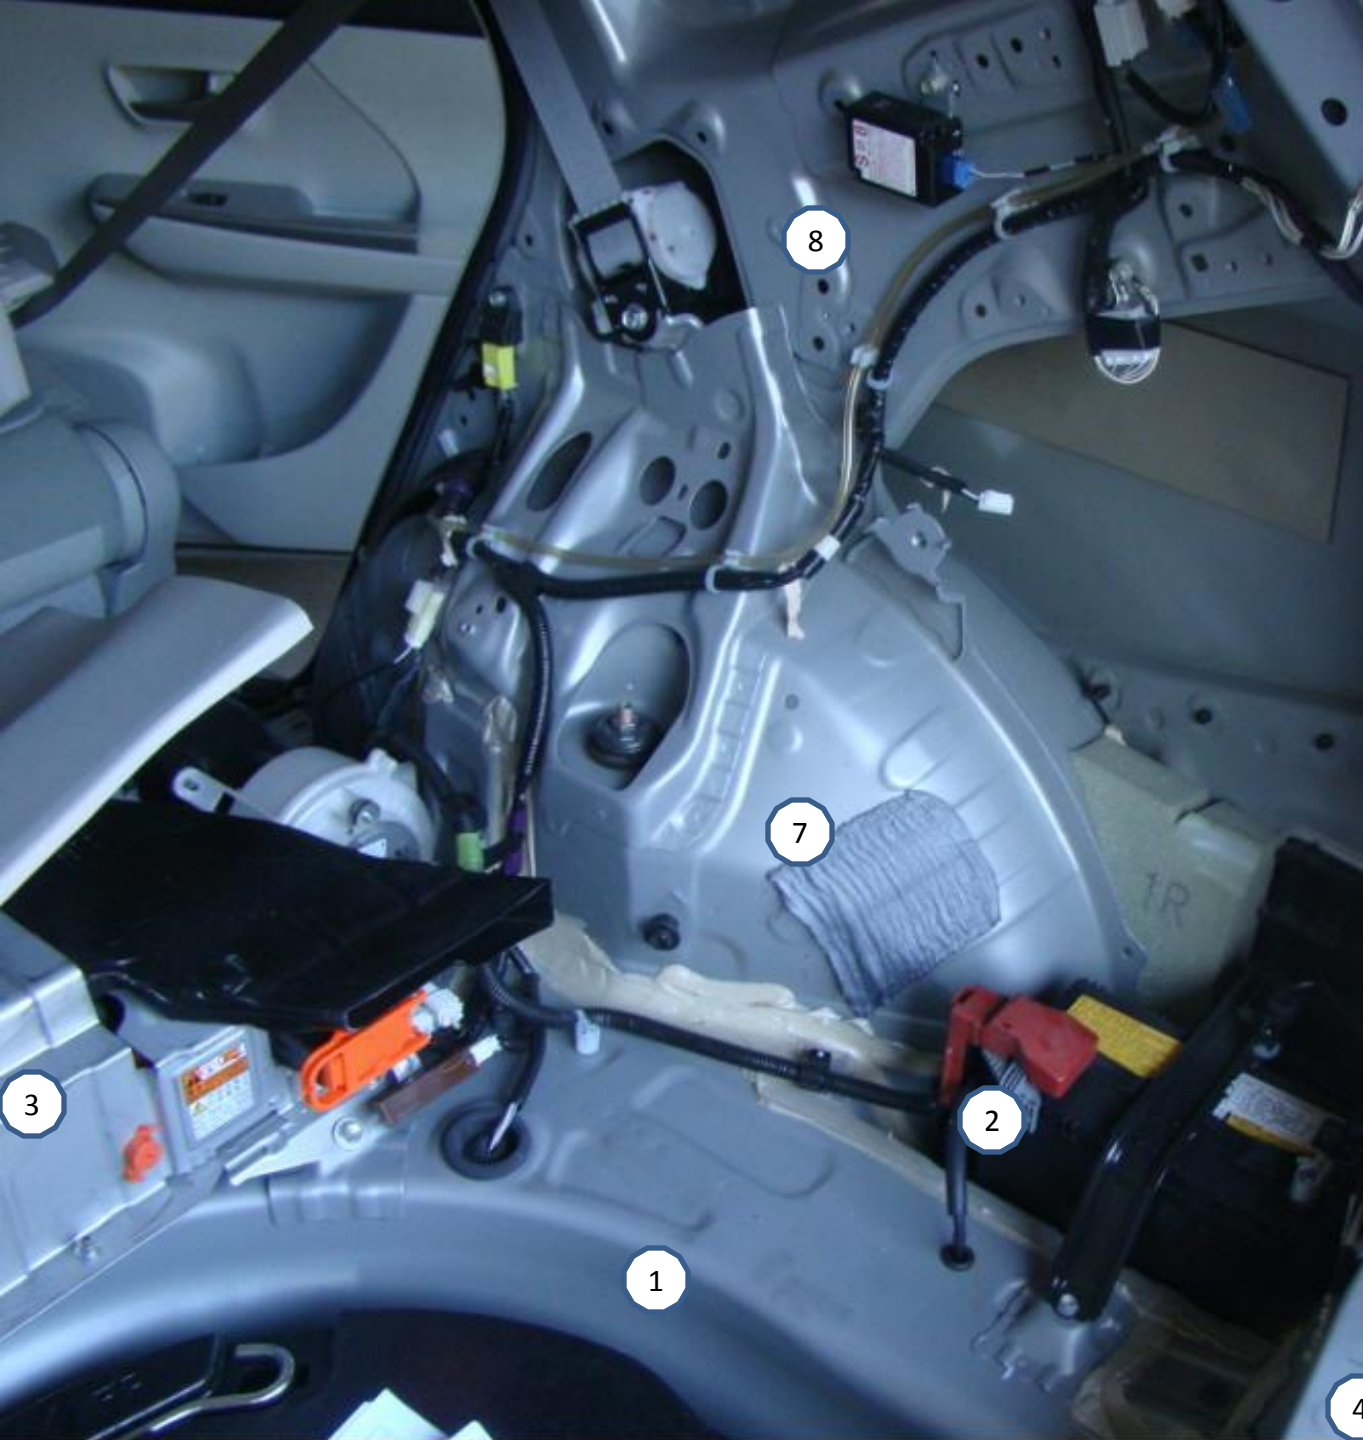


## Panels Removed in this Picture

1. Remove all Back Foam Panels
2. Remove 12v Battery Cover Panel
3. Remove Panel over HV Battery to Back Seat "Rear #1 Floor Board" (One 10mm bolt and Clips)
4. Remove "Back Door Scuff Plate" at Rear Hatch
5. Remove Right Rear Door Scuff Plate (pic next page)
6. Remove Rear "Right Seat Outer Belt" 22mm on Floor (next page)
7. Remove Lower Right "Deck Trim Side Panel" and "Trim Panels" on same (two – one covers bolt and the other is the 12v outlet) (Two 10mm bolts – and Clips) (Remove Third 10 mm bolt if equipped with Cargo Net)
8. Remove Upper Right Panel with Clips
9. Remove Upper Right Small Window Panel "Rear Roof Side Rail" with Clips (next page)
10. Remove three Exposed Push Clips holding Headliner in back (next page)
11. Partially Pull Headliner Down until Antenna Base Nut and Cables are Accessible (next page)
12. Remove Antenna Connectors first then Cable Retainers starting at Connector End (next page).
13. Remove Base Nut and depress built in retainer hooks to remove. (See new part for clarity)




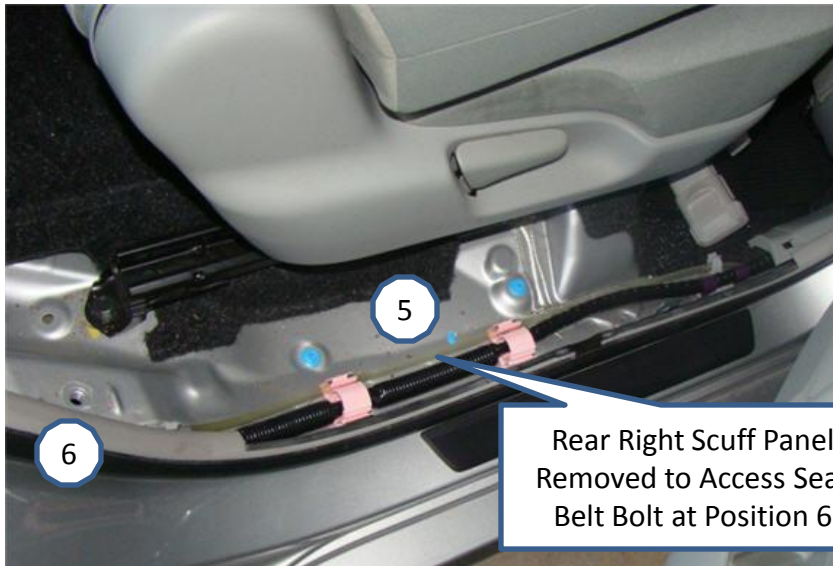


Rear Right Scuff Panel Removed to Access Seat Belt Bolt at Position 6

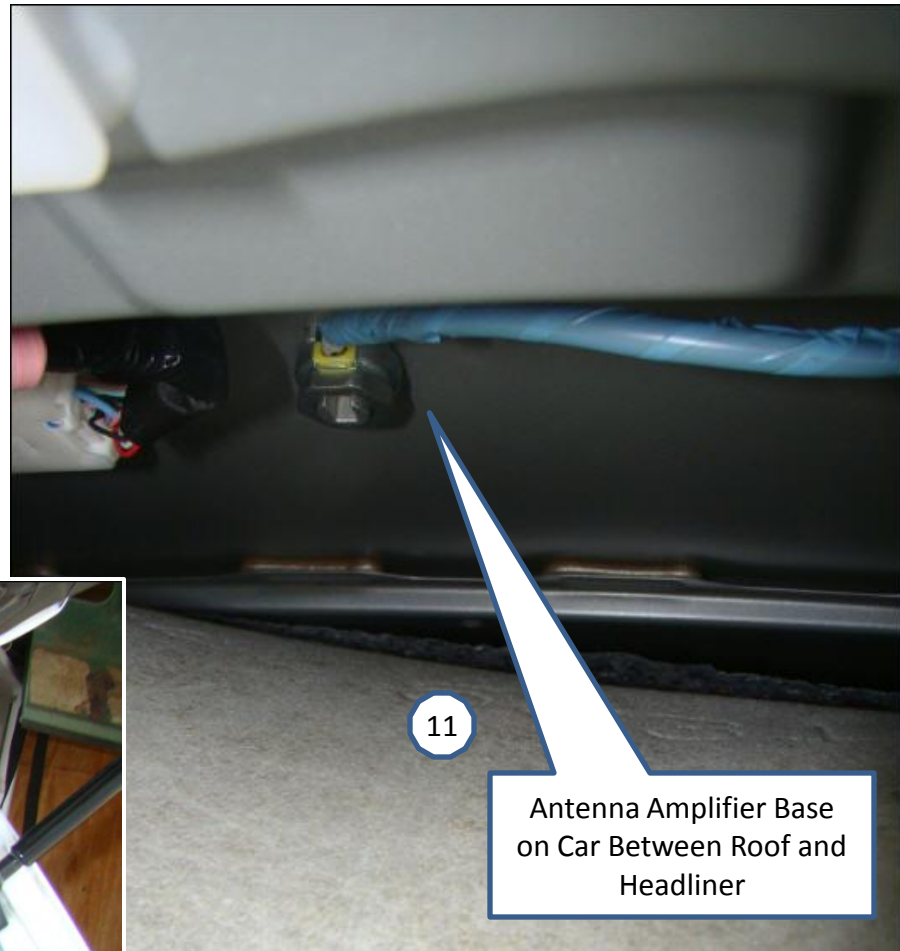

Antenna Amplifier Base on Car Between Roof and Headliner

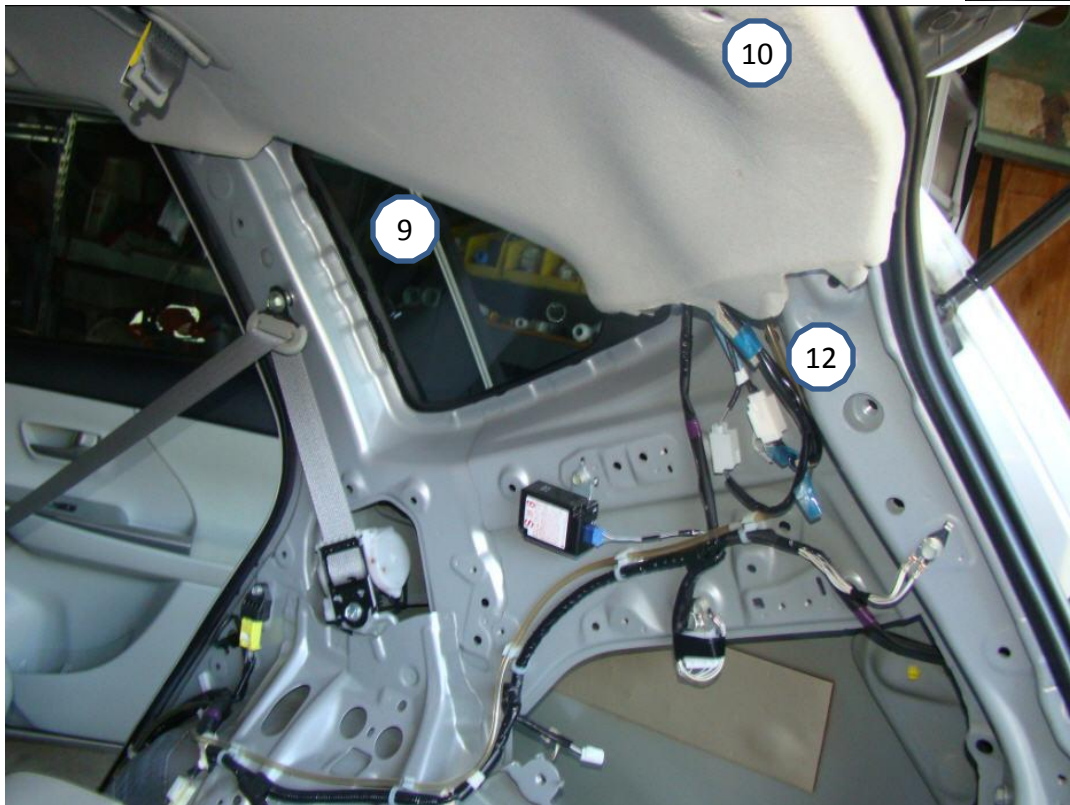

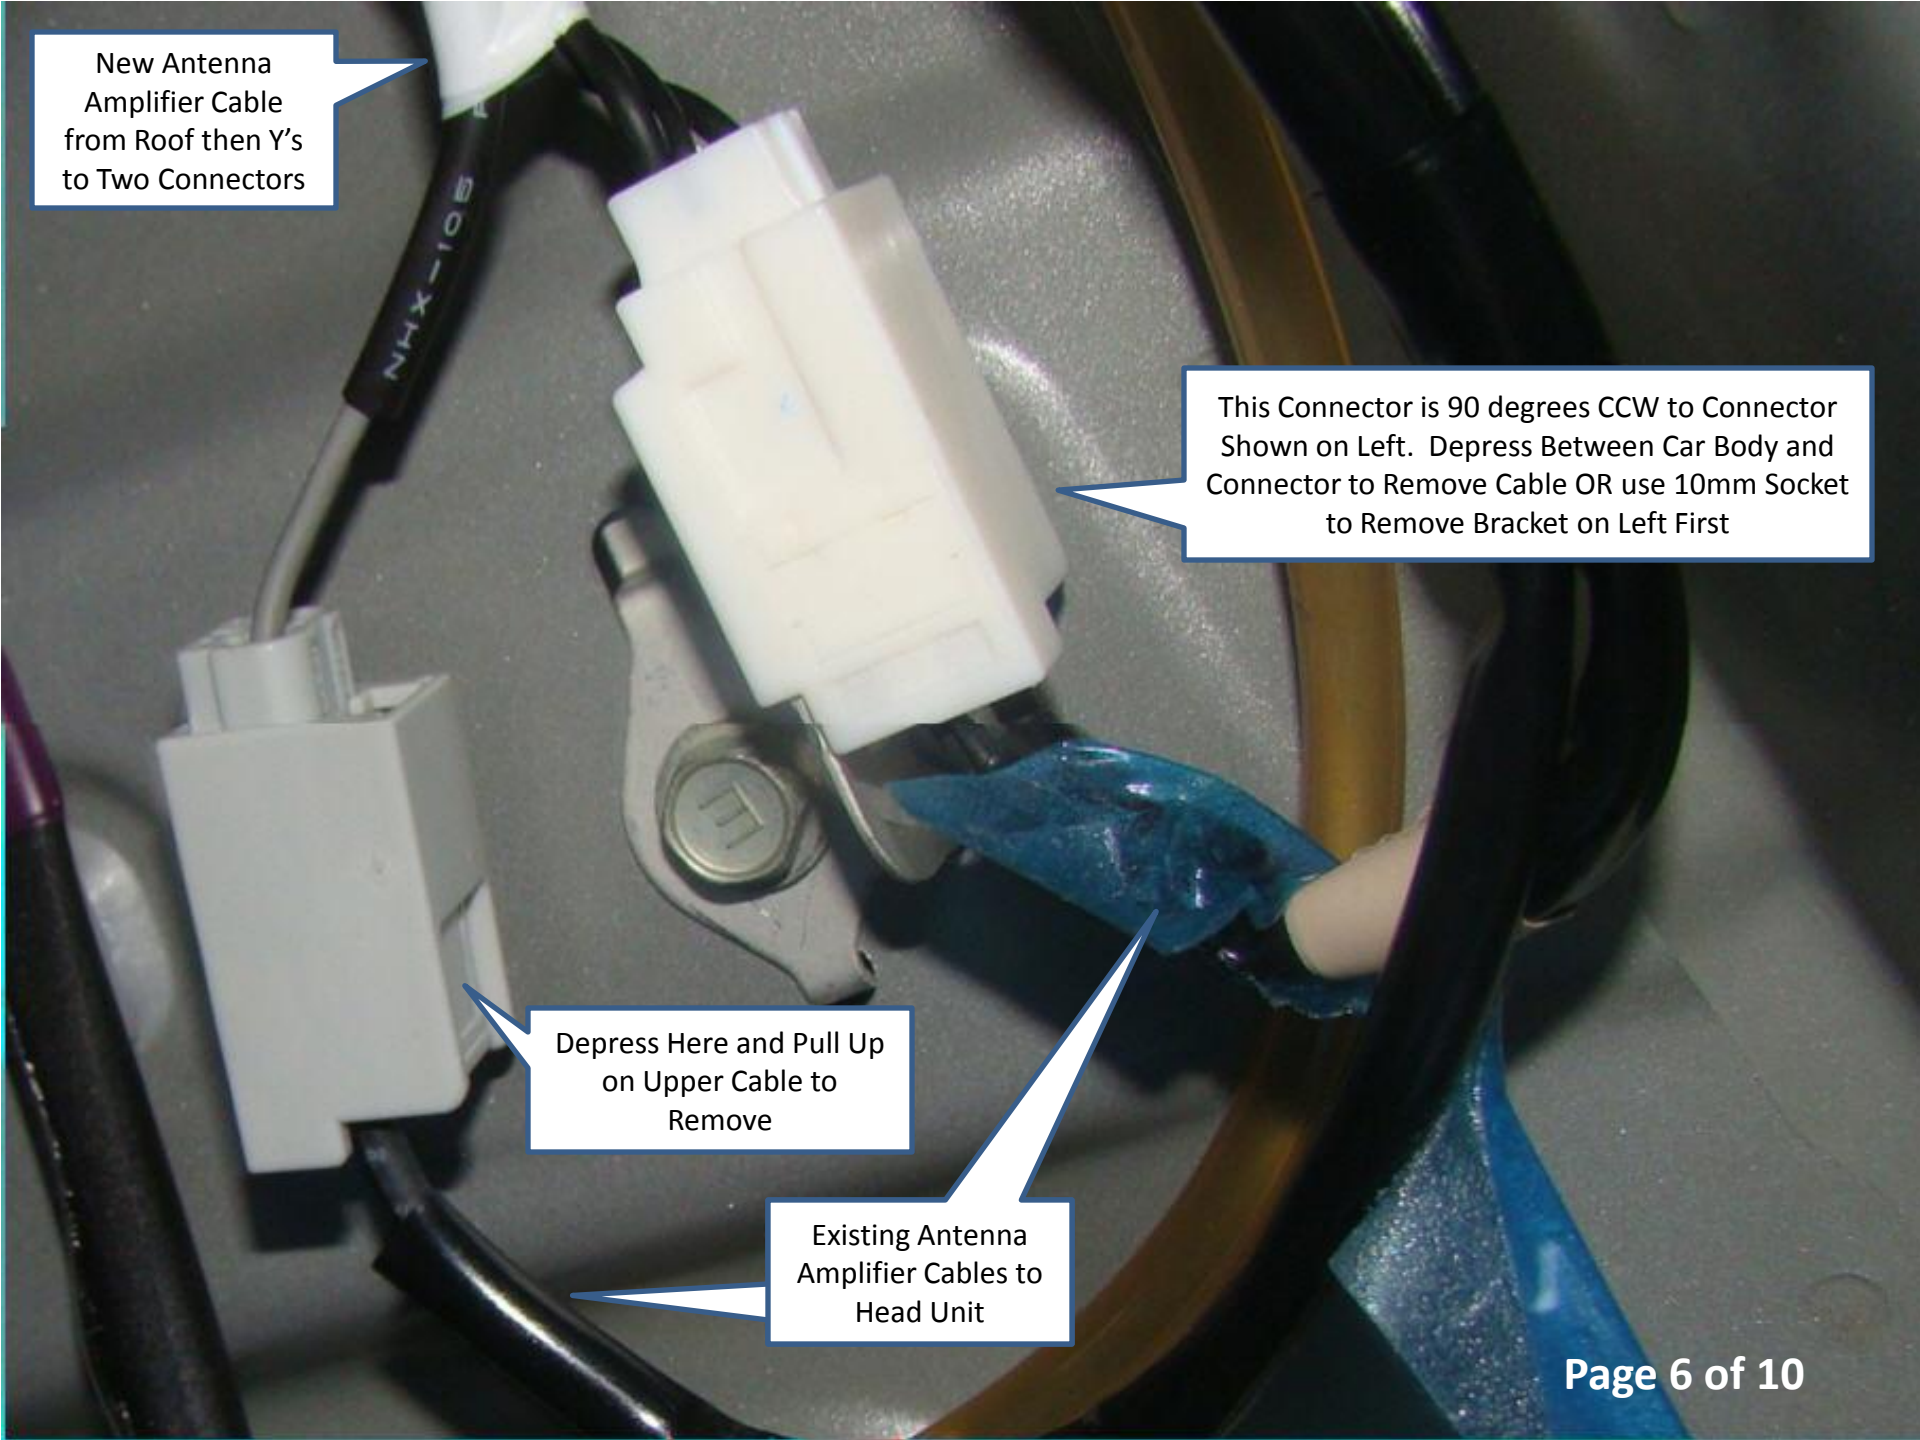A close-up photograph of a car's antenna amplifier system. The image shows a grey metal surface with several cables and connectors. A black cable with 'NHX-105' printed on it is connected to a white multi-pin connector. To the left, another white connector is shown with a cable plugged into it. A blue plastic component is attached to the main white connector. A metal bracket with a circular hole is also visible. Callout boxes with blue borders and white text provide instructions for removal and identification of the components.

New Antenna  
Amplifier Cable  
from Roof then Y's  
to Two Connectors

This Connector is 90 degrees CCW to Connector  
Shown on Left. Depress Between Car Body and  
Connector to Remove Cable OR use 10mm Socket  
to Remove Bracket on Left First

Depress Here and Pull Up  
on Upper Cable to  
Remove

Existing Antenna  
Amplifier Cables to  
Head Unit




Two Spring Loaded Black Retainer Latches


12

Press at Top of Threads after Nut Removed and Push Up Through Roof



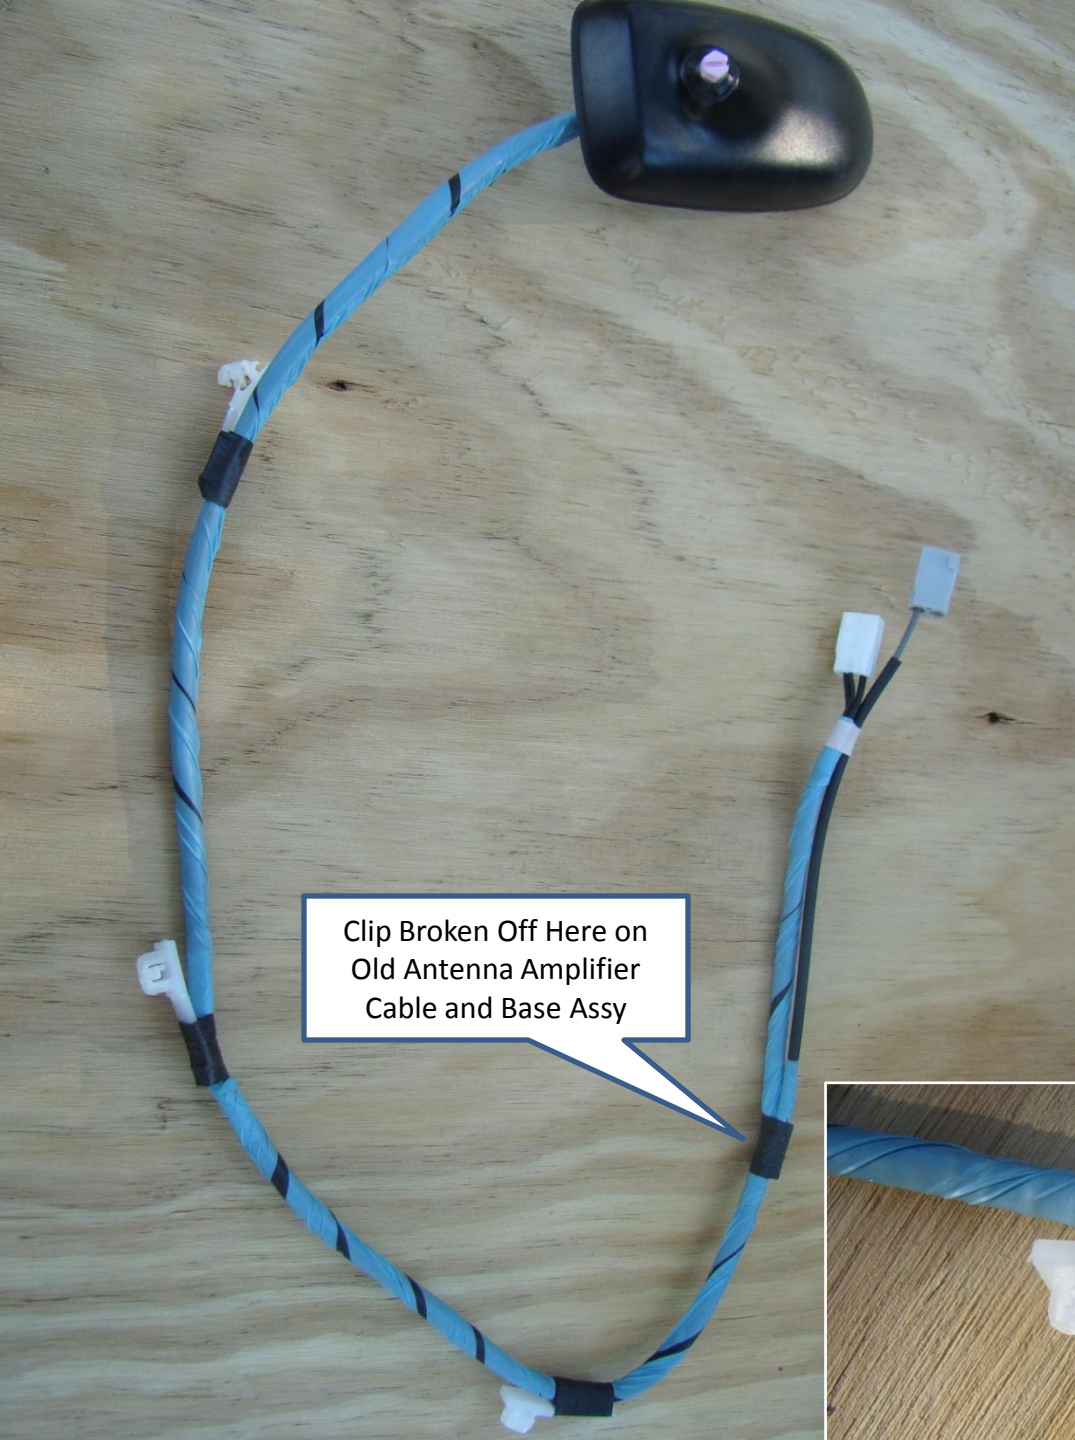

Clip Broken Off Here on Old Antenna Amplifier Cable and Base Assy

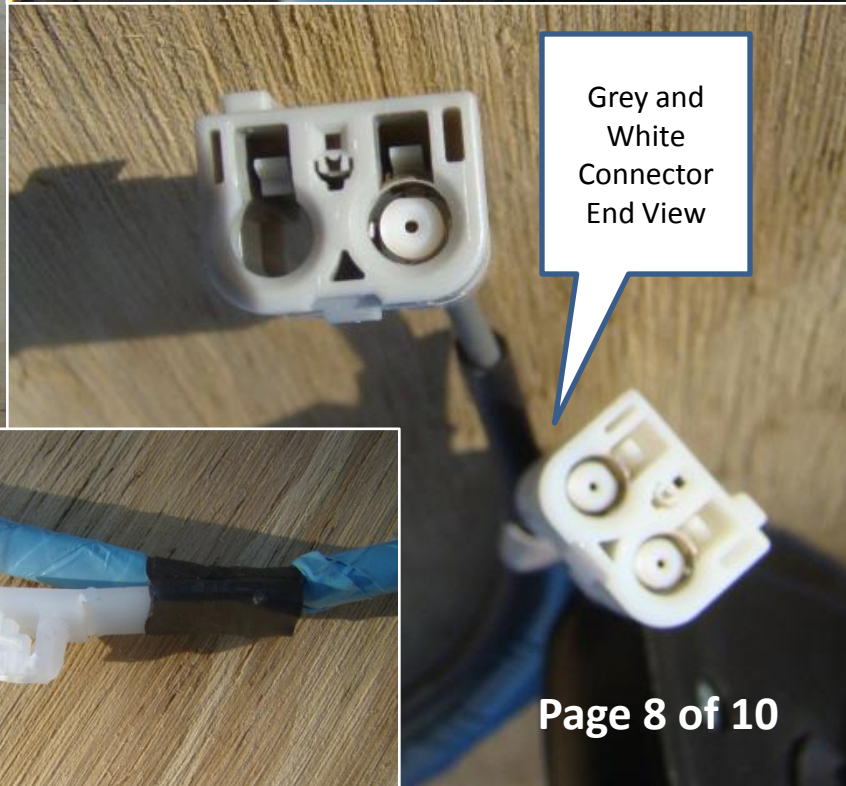

Grey and White Connector End View





# Toyota onlineparts.com

We earn your trust every day

## Toyota Online Parts

### Billing Information

Richard

Email:

Customer Notes: Ship part 86960-47031 only - not earlier revisions  
 Vehicle Identification Number: JTDZN3EU8C3028704

### Order ID:

Created at: 01/24/2016 -

03:09:08 PM

Last status change: 01/24/2016

- 03:09:08 PM

Toyota Online Parts  
 9319 West Broad Street,  
 Richmond, Virginia 23294  
 USA

Phone: 1-800-888-9753 Press #  
 3 Toyota Wholesale Parts

Fax:

Email:

service@toyotaonlineparts.com

Website:

http://www.toyotaonlineparts.com

Phone \_\_\_\_\_  
 \_\_\_\_\_ BF \_\_\_\_\_  
 \_\_\_\_\_ tion at PayPal

**86960-47031**



United States  
 CITY: 1 01115  
 TOYOTA MOTOR CORPORATION  
 MADE IN CHINA

Product ID	Product Name	List Price	Your Price	Quantity	Total
86960-47031	ANTENNA ASSY SATELL	\$229.46	\$154.37	1	\$154.37
			(not taxable)		

Subtotal : \$154.37

Shipping (UPS - Ground (1-5 days in transit from shipping date check transit time map - (Link at bottom of pag) : \$22.24

**Total : \$176.61**

### Payment Information

Method : Real-time, PayPal Express Checkout


Gateway : PayPal Express Checkout

Completed at : 01/24/2016 - 03:09:08 PM


Order Custom Fields Values

VIN NUMBER :

4

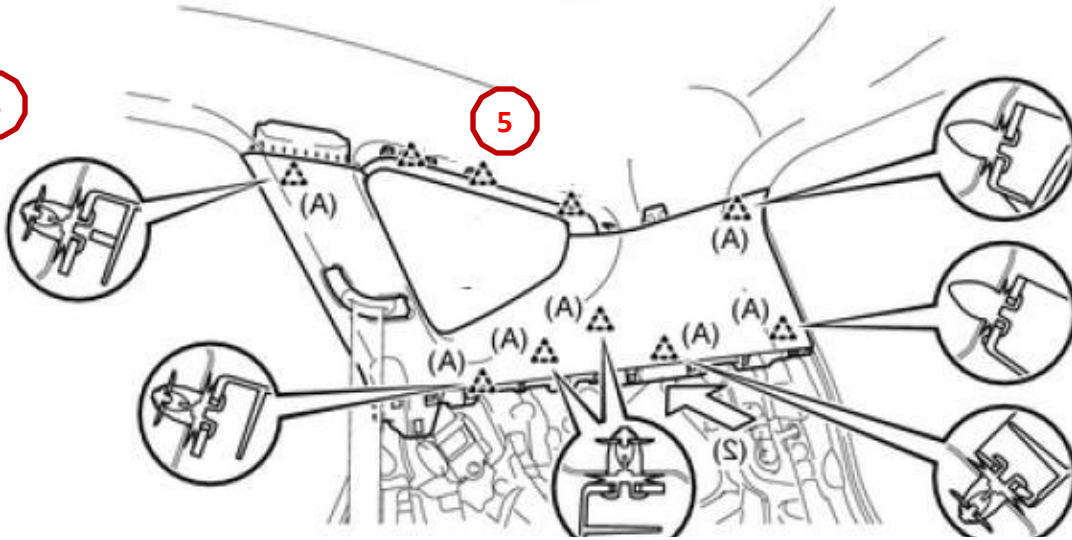


5

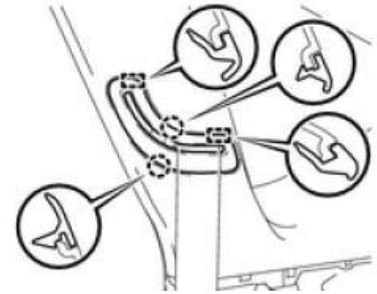


Seat Belt Guide (Left In Panel but could be removed)

3

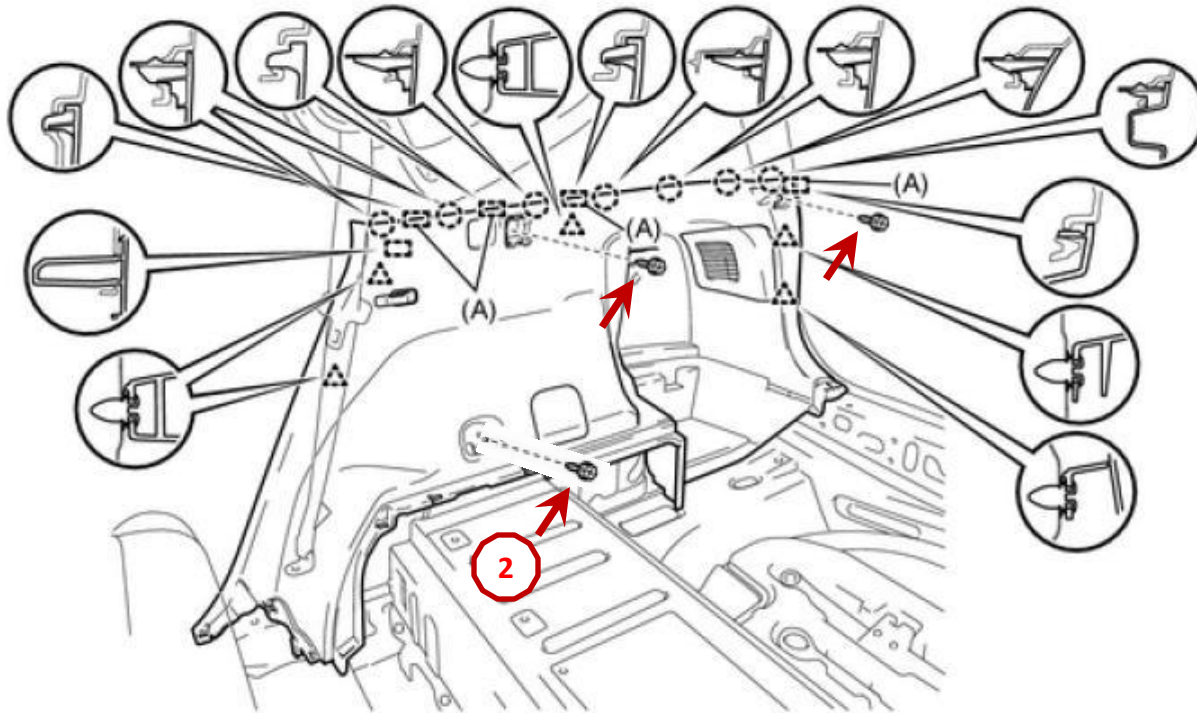

2

1

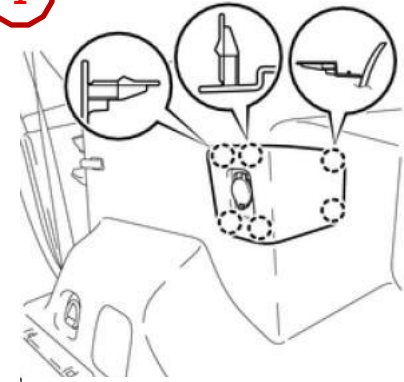

12v Power Outlet Panel Removed and Disconnected