
REMOVAL

- 1. REMOVE UPPER INSTRUMENT PANEL ASSEMBLY
- (a) Remove the upper instrument panel assembly ...
- 2. REMOVE NO. 1 HEATER TO REGISTER DUCT.
- 3. REMOVE COMBINATION METER ASSEMBLY

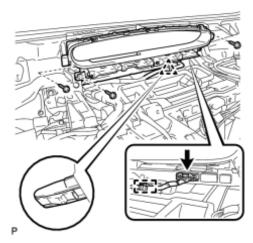

(a) Disconnect the connector.


- (b) Disengage the clamp.
- (c) Remove the 3 screws.
- (d) Disengage the clip and remove the combination meter assembly.

DISASSEMBLY

NOTICE:


When disassembling the combination meter assembly, eliminate static electricity by touching the vehicle body to prevent components from being damaged.

1. REMOVE INSTRUMENT PANEL FINISH PANEL SUB-ASSEMBLY

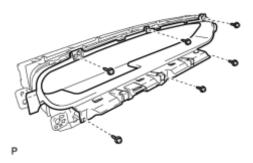


(a) Remove the 6 screws and instrument panel finish panel sub-assembly.

2. REMOVE NO. 3 COMBINATION METER COVER




(a) Remove the 3 screws.




(b) Disengage the 7 claws and 2 guides to remove the No. 3 combination meter cover.

3. REMOVE METER CIRCUIT PLATE


(a) Disconnect the connector as shown in the illustration.

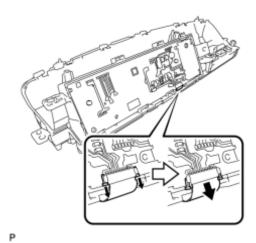



(b) Disengage the 2 guides to remove the meter circuit plate.


4. REMOVE NO. 2 COMBINATION METER COVER

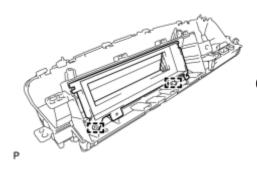


(a) Disengage the 2 guides to remove the No. 2 combination meter cover.

5. REMOVE NO. 1 COMBINATION METER COVER


(a) Disengage the 2 guides to remove the No. 1 combination meter cover.

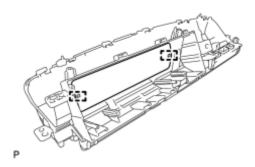

6. REMOVE NO. 4 COMBINATION METER COVER

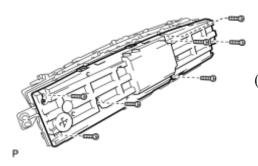


(a) Remove the 7 screws.

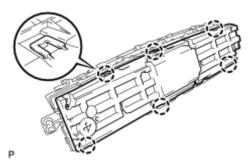


(b) Disengage the 6 claws to remove the No. 4 combination meter cover.


7. REMOVE NO. 2 METER CIRCUIT PLATE

(a) Disconnect the connector as shown in the illustration.

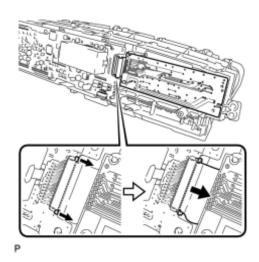




(b) Disengage the 2 guides to remove the No. 2 meter circuit plate.

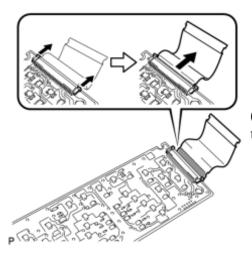


(c) Disconnect the connector to remove the No. 5 meter circuit plate from the No. 2 meter circuit plate as shown in the illustration.

8. REMOVE NO. 2 COMBINATION METER CASE

(a) Disengage the 2 guides to remove the No. 2 combination meter case.




9. REMOVE NO. 1 METER LENS



(a) Disengage the 2 guides to remove the No. 1 meter lens.


10. REMOVE NO. 4 METER CIRCUIT PLATE

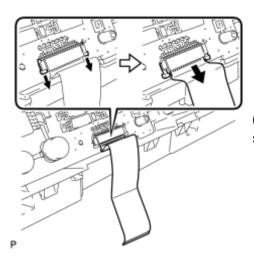


(a) Disconnect the connector to remove the No. 4 meter circuit plate as shown in the illustration.

11. REMOVE NO. 3 METER CIRCUIT PLATE

(a) Disengage the 2 guides to remove the No. 3 meter circuit plate.

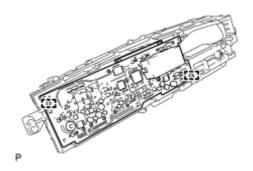


12. REMOVE COMBINATION METER CASE

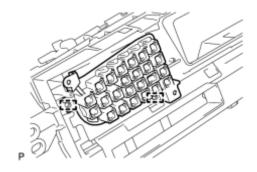


(a) Disengage the 2 guides to remove the combination meter case.

13. REMOVE NO. 2 METER LENS




(a) Disengage the 2 guides to remove the No. 2 meter lens.

14. REMOVE NO. 3 METER LENS

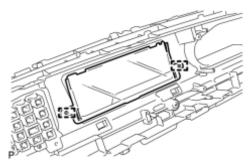

(a) Disengage the 2 guides to remove the No. 3 meter lens.

15. REMOVE NO. 1 COMBINATION METER REFLECTOR

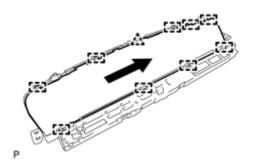


(a) Disengage the clip and 9 guides, and remove the No. 1 combination meter reflector as shown in the illustration.

16. REMOVE NO. 3 COMBINATION METER CASE


REASSEMBLY

- 1. INSTALL NO. 3 COMBINATION METER CASE
- 2. INSTALL NO. 1 COMBINATION METER REFLECTOR

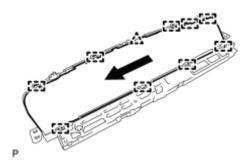


(a) Engage the clip and 9 guides to install the No. 1 combination meter reflector as shown in the illustration.

3. INSTALL NO. 3 METER LENS

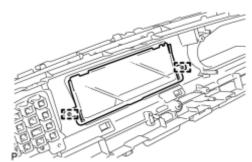

(a) Engage the 2 guides to install the No. 3 meter lens.


4. INSTALL NO. 2 METER LENS




(a) Engage the 2 guides to install the No. 2 meter lens.

5. INSTALL COMBINATION METER CASE

(a) Engage the 2 guides to install the combination meter case.

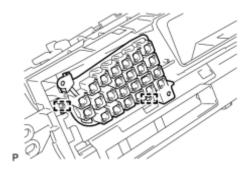


6. INSTALL NO. 3 METER CIRCUIT PLATE

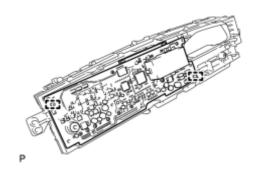

(a) Engage the 2 guides to install the No. 3 meter circuit plate.


7. INSTALL NO. 4 METER CIRCUIT PLATE

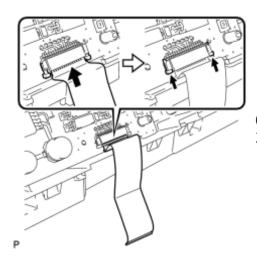


(a) Connect the connector to install the No. 4 meter circuit plate to the No. 3 meter circuit plate.

8. INSTALL NO. 1 METER LENS

(a) Engage the 2 guides to install the No. 1 meter lens.




9. INSTALL NO. 2 COMBINATION METER CASE




(a) Engage the 2 guides to install the No. 2 combination meter case.


10. INSTALL NO. 2 METER CIRCUIT PLATE

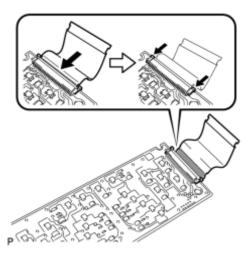

(a) Connect the connector to install the No. 5 meter circuit plate to the No. 2 meter circuit plate.


(b) Engage the 2 guides to install the No. 2 meter circuit plate.



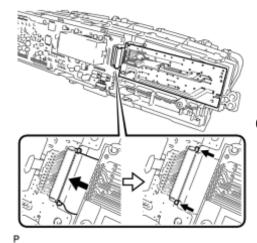


(c) Connect the connector as shown in the illustration.

11. INSTALL NO. 4 COMBINATION METER COVER

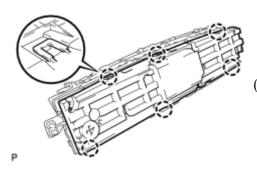


(a) Engage the 6 claws.

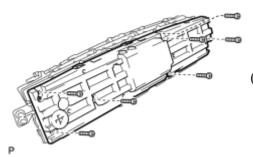


(b) Install the No. 4 combination meter cover with the 7 screws.

12. INSTALL NO. 1 COMBINATION METER COVER




(a) Engage the 2 guides to install the No. 1 combination meter cover.

13. INSTALL NO. 2 COMBINATION METER COVER

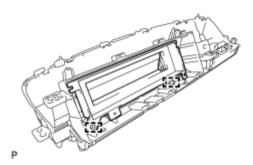


(a) Engage the 2 guides to install the No. 2 combination meter cover.

14. INSTALL METER CIRCUIT PLATE

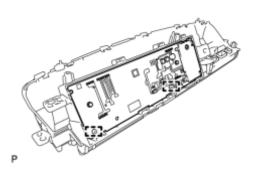


(a) Engage the 2 guides to install the meter circuit plate.


(b) Connect the connector as shown in the illustration.

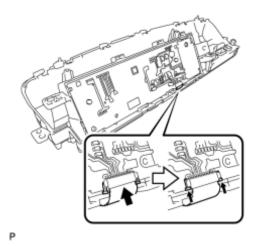

15. INSTALL NO. 3 COMBINATION METER COVER

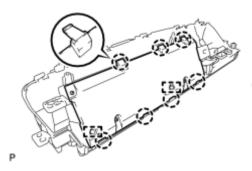


(a) Engage the 7 claws and 2 guides.



(b) Install the No. 3 combination meter cover with the 3 screws.


16. INSTALL INSTRUMENT PANEL FINISH PANEL SUB-ASSEMBLY

(a) Install the instrument panel finish panel sub-assembly with the 6 screws.

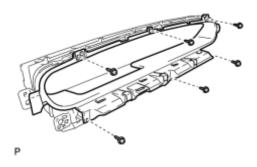


INSTALLATION

1. INSTALL COMBINATION METER ASSEMBLY

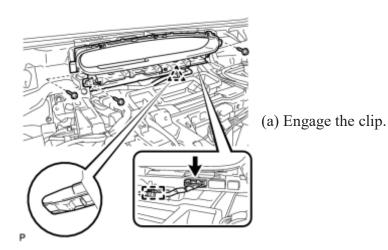

- (b) Install the combination meter assembly with the 3 screws.
- (c) Engage the clamp.
- (d) Connect the connector.
- 2. INSTALL NO. 1 HEATER TO REGISTER DUCT_
- 3. INSTALL UPPER INSTRUMENT PANEL ASSEMBLY
- (a) Install the upper instrument panel assembly ...

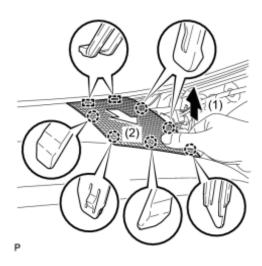


32. REMOVE FRONT NO. 2 SPEAKER ASSEMBLY

HINT:

Use the same procedure for the RH side and LH side ...


33. REMOVE CENTER INSTRUMENT CLUSTER FINISH PANEL GARNISH

- (a) Remove the 2 screws <C>.
- (b) Disengage the 7 claws.
- (c) Disconnect the connector and remove the center instrument cluster finish panel garnish.

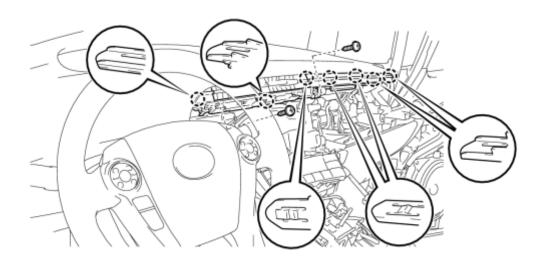


- 34. DISCONNECT NO. 3 INSTRUMENT PANEL WIRE
- 35. REMOVE UPPER INSTRUMENT PANEL ASSEMBLY
- (a) Disconnect each connector.

(b) Disengage the 2 clamps.

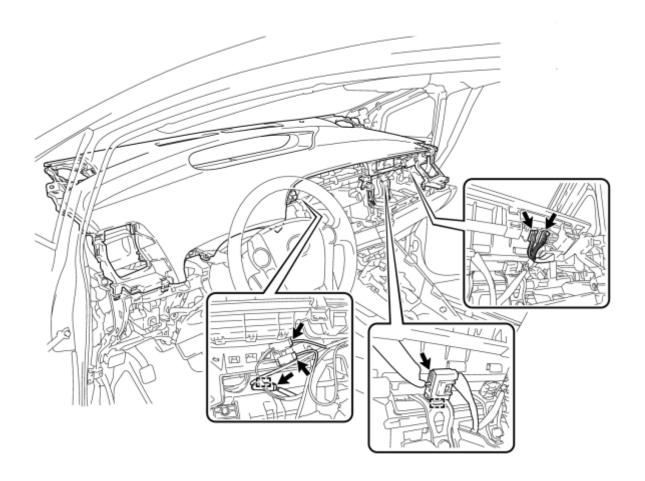

(c) Remove the 2 bolts .


(d) Remove the 2 passenger airbag bolts <A>.

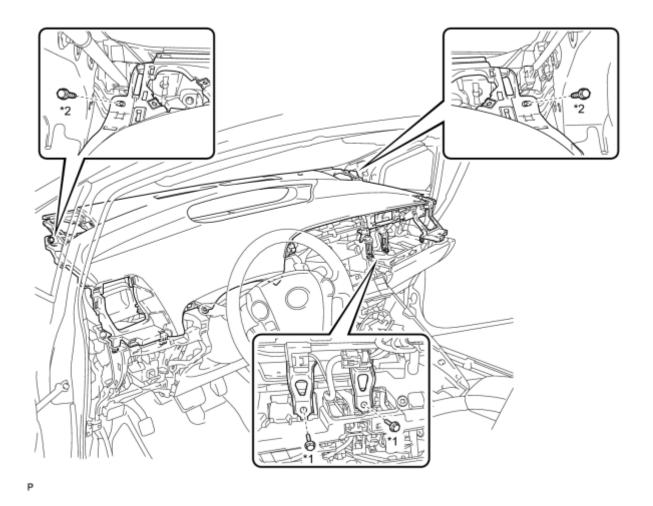

Text in Illustration


*1	Passenger Airbag Bolt <a>	*2 Bolt

- (e) Pull the upper instrument panel assembly in the direction indicated by the arrow to disengage the 2 claws and 4 clips.
- (f) Pull the upper instrument panel assembly in the direction indicated by the arrow to disengage the 5 claws and remove the upper instrument panel assembly.

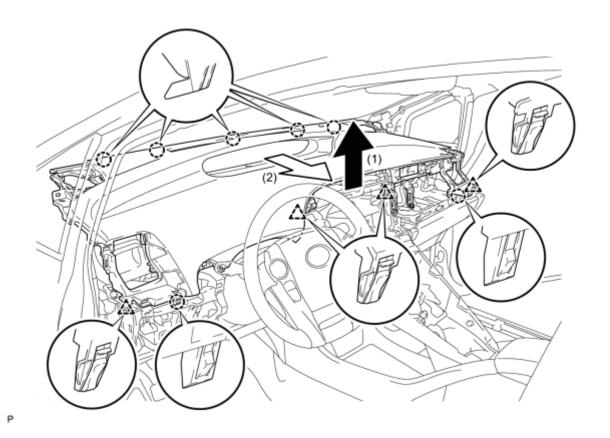


DISASSEMBLY

1. REMOVE NO. 3 HEATER TO REGISTER DUCT




(a) Remove the 3 screws <C> and No. 3 heater to register duct.

2. REMOVE NO. 2 HEATER TO REGISTER DUCT

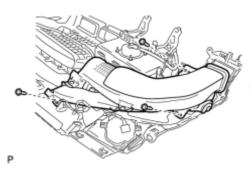


(a) Remove the 3 screws <C> and No. 2 heater to register duct.

- 3. REMOVE PLASMACLUSTER WITH BRACKET (w/ Plasmacluster)_______
- 4. REMOVE NAVIGATION ANTENNA ASSEMBLY (w/ Navigation System)
- 5. REMOVE AUTOMATIC LIGHT CONTROL SENSOR NFO
- 6. REMOVE NO. 2 INSTRUMENT PANEL WIRE
- (a) Disconnect the connector.
- (b) Disengage the 2 claws and each clamp, and remove the No. 2 instrument panel wire.

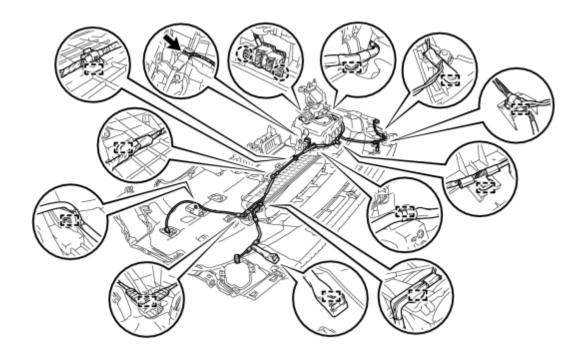


7. REMOVE NO. 5 INSTRUMENT PANEL WIRE

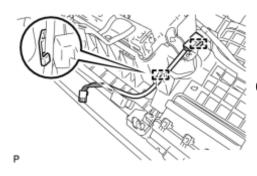

(a) Disengage the 2 clamps and remove the No. 5 instrument panel wire.

8. REMOVE INSTRUMENT CLUSTER FINISH PANEL ASSEMBLY

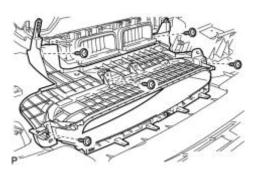


(a) Remove the 5 screws <C> and instrument cluster finish panel assembly.


9. REMOVE CENTER INSTRUMENT PANEL REGISTER ASSEMBLY

(a) Remove the 3 screws <C> and center instrument panel register






10. REMOVE METER HOOD SPACER



(a) Remove the 2 screws <C> and meter hood spacer.

11. REMOVE FRONT PASSENGER SIDE AIRBAG ASSEMBLY________


12. REMOVE NO. 1 INSTRUMENT PANEL CUSHION




(a) Remove the No. 1 instrument panel cushion.

13. REMOVE INSTRUMENT PANEL CUSHION

(a) Remove the instrument panel cushion.

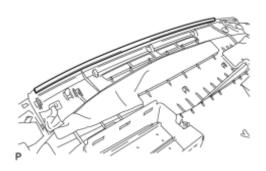


14. REMOVE NO. 2 INSTRUMENT PANEL CUSHION




(a) Remove the No. 2 instrument panel cushion.

15. REMOVE NO. 4 INSTRUMENT PANEL CUSHION



(a) Remove the No. 4 instrument panel cushion.


16. REMOVE NO. 5 INSTRUMENT PANEL CUSHION



(a) Remove the No. 5 instrument panel cushion.


REASSEMBLY

1. INSTALL NO. 5 INSTRUMENT PANEL CUSHION



(a) Using hot-melt glue and install a new No. 5 instrument panel cushion as shown in the illustration.

2. INSTALL NO. 4 INSTRUMENT PANEL CUSHION

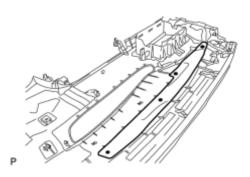

(a) Using hot-melt glue and install a new No. 4 instrument panel cushion as shown in the illustration.


3. INSTALL NO. 2 INSTRUMENT PANEL CUSHION



(a) Using hot-melt glue and install a new No. 2 instrument panel cushion as shown in the illustration.

4. INSTALL INSTRUMENT PANEL CUSHION

(a) Align the marking lines on the upper instrument panel with the ends of the instrument panel cushion and install a new instrument panel cushion

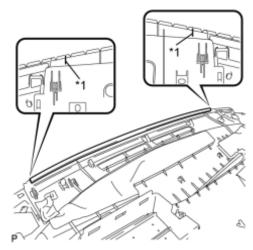


as shown in the illustration.

Text in Illustration

*1 Marking Line

5. INSTALL NO. 1 INSTRUMENT PANEL CUSHION

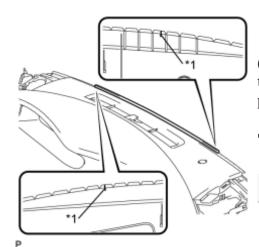


(a) Align the marking lines on the upper instrument panel with the ends of the No. 1 instrument panel cushion and install a new No. 1 instrument panel cushion as shown in the illustration.

Text in Illustration


*1 Marking Line

- 6. INSTALL FRONT PASSENGER SIDE AIRBAG ASSEMBLY.
- 7. INSTALL METER HOOD SPACER

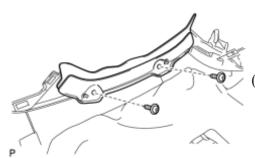


(a) Install the meter hood spacer with the 2 screws <C>.

8. INSTALL CENTER INSTRUMENT PANEL REGISTER ASSEMBLY




(a) Install the center instrument panel register assembly with the 3 screws <C>.

9. INSTALL INSTRUMENT CLUSTER FINISH PANEL ASSEMBLY



(a) Install the instrument cluster finish panel assembly with the 5 screws <C>.


10. INSTALL NO. 5 INSTRUMENT PANEL WIRE

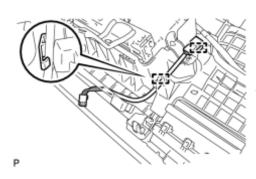


(a) Engage the 2 clamps to install the No. 5 instrument panel wire.

11. INSTALL NO. 2 INSTRUMENT PANEL WIRE

- (a) Engage each clamp and 2 claws.
- (b) Connect the connector to install the No. 2 instrument panel wire.

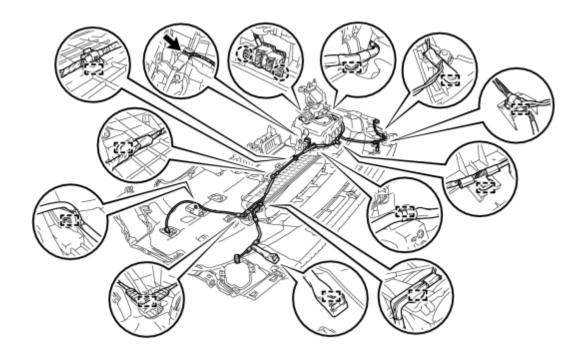


- 12. INSTALL AUTOMATIC LIGHT CONTROL SENSOR NEO
- 13. INSTALL NAVIGATION ANTENNA ASSEMBLY (w/ Navigation System)
- 14. INSTALL PLASMACLUSTER WITH BRACKET (w/ Plasmacluster)
- 15. INSTALL NO. 2 HEATER TO REGISTER DUCT

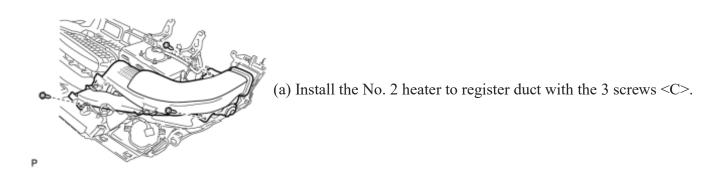

16. INSTALL NO. 3 HEATER TO REGISTER DUCT

(a) Install the No. 3 heater to register duct with the 3 screws <C>.

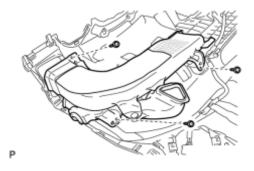


INSTALLATION

- 1. INSTALL UPPER INSTRUMENT PANEL ASSEMBLY
- (a) When using a new upper instrument panel sub-assembly:
- (1) Immediately before installing the upper instrument panel assembly, twist and cut off the portions shown in the illustration.



Р


- (b) Engage the 5 claws as shown in the illustration.
- (c) Engage the 2 claws and 4 clips, and install the upper instrument panel assembly as shown in the illustration.

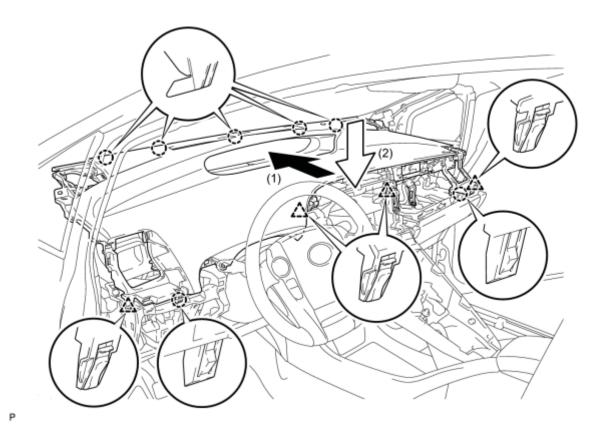

(d) Install the 2 bolts .

(e) Install the 2 passenger airbag bolts <A>.


Torque: 20 N·m (204 kgf·cm, 15ft·lbf)

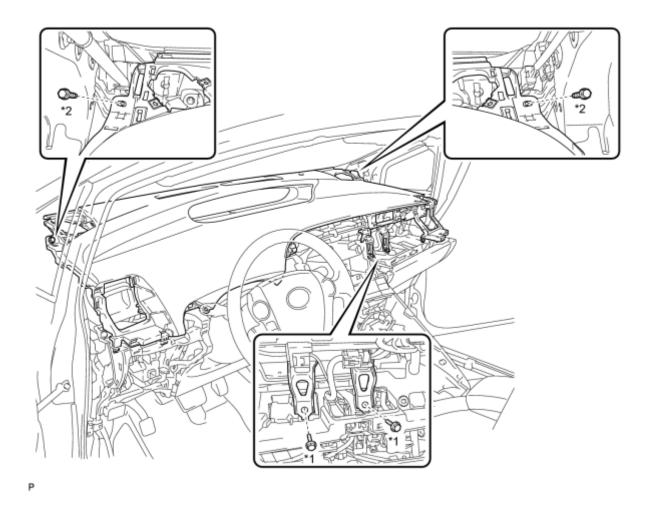

Text in Illustration

*1	Passenger Airbag Bolt <a>	*2	Bolt
l .	8 8		


- (f) Engage the 2 clamps.
- (g) Connect each connector.

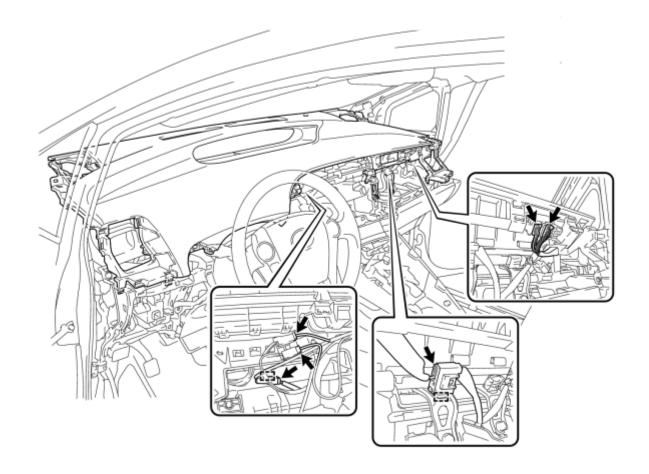

2. CONNECT NO. 3 INSTRUMENT PANEL WIRE

3. INSTALL CENTER INSTRUMENT CLUSTER FINISH PANEL GARNISH

- (a) Connect the connector.
- (b) Engage the 7 claws.
- (c) Install the center instrument cluster finish panel garnish with the 2 screws <C>.

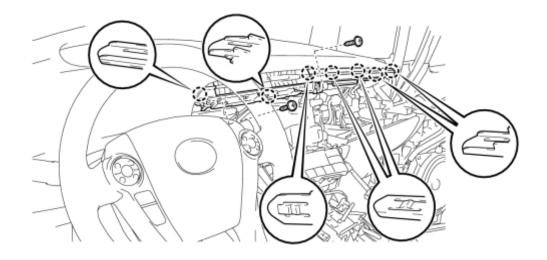


4. INSTALL FRONT NO. 2 SPEAKER ASSEMBLY

HINT:

Use the same procedure for the RH side and LH side ...


5. INSTALL NO. 2 INSTRUMENT PANEL SPEAKER PANEL SUB-ASSEMBLY

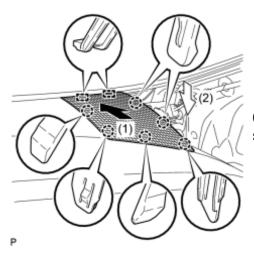

(a) Engage the 2 guides and 6 claws to install the No. 2 instrument panel speaker panel sub-assembly as shown in the illustration.

6. INSTALL FRONT PILLAR GARNISH CORNER PIECE RH

(a) Engage the 3 claws to install the front pillar garnish corner piece RH.

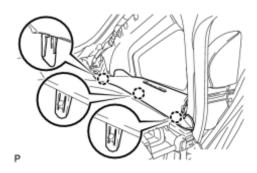


7. INSTALL FRONT PILLAR GARNISH RH

HINT:


Use the same procedure for the RH side and LH side ...

- 8. INSTALL FRONT NO. 2 SPEAKER ASSEMBLY_
- 9. INSTALL NO. 1 INSTRUMENT PANEL SPEAKER PANEL SUB-ASSEMBLY

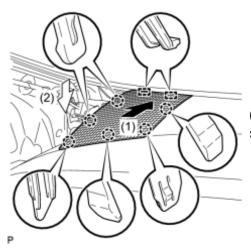


(a) Engage the 2 guides and 6 claws to install the No. 1 instrument panel speaker panel sub-assembly as shown in the illustration.

10. INSTALL FRONT PILLAR GARNISH CORNER PIECE LH

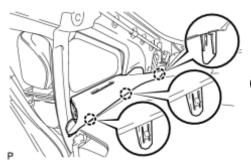


(a) Engage the 3 claws to install the front pillar garnish corner piece LH.


12. INSTALL INSTRUMENT PANEL FINISH PANEL END RH

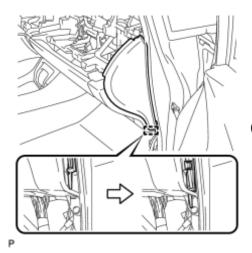

(a) Engage the guide as shown in the illustration.

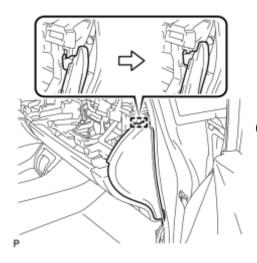

(b) Engage the guide as shown in the illustration.




(c) Engage the 4 claws to install the instrument panel finish panel end RH.

13. CONNECT FRONT DOOR OPENING TRIM WEATHERSTRIP RH


14. INSTALL GLOVE COMPARTMENT DOOR

- (a) Open the glove compartment door assembly.
 - (b) Insert the glove compartment door as shown in the illustration.

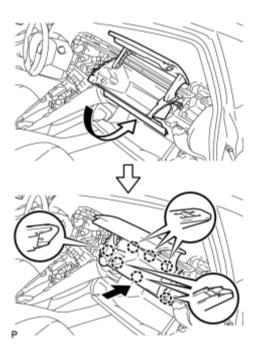


(c) Engage the 7 claws to install the glove compartment door.

15. INSTALL NO. 2 INSTRUMENT PANEL REGISTER

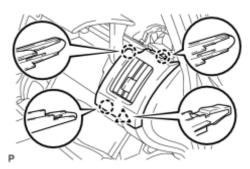


(a) Engage the 3 claws and clip to install the No. 2 instrument panel register.

16. INSTALL NO. 1 SIDE DEFROSTER NOZZLE




(a) Engage the 3 claws to install the No. 1 side defroster nozzle.


17. INSTALL INSTRUMENT PANEL FINISH PANEL END LH

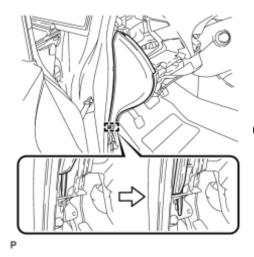

(a) Engage the guide as shown in the illustration.

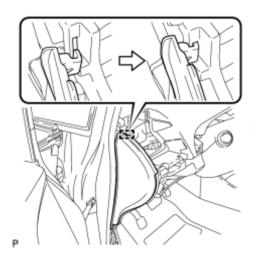

(b) Engage the guide as shown in the illustration.

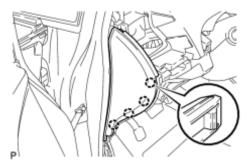

(c) Engage the 4 claws to install the instrument panel finish panel end LH.


18. CONNECT FRONT DOOR OPENING TRIM WEATHERSTRIP LH

19. INSTALL NO. 1 CENTER INSTRUMENT CLUSTER FINISH PANEL

(a) Engage the 4 claws to install the No. 1 center instrument cluster finish panel.




20. INSTALL NO. 1 INSTRUMENT PANEL REGISTER

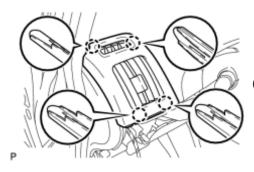

(a) Engage the 4 claws to install the No. 1 instrument panel register.


21. INSTALL LOWER INSTRUMENT PANEL FINISH PANEL ASSEMBLY

- (a) Connect each connector.
- (b) Engage the clamp.

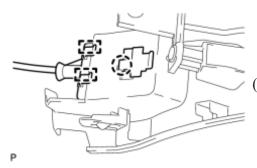

(c) Engage the 2 guides and claw to connect the hood lock control cable.


(d) Engage the 6 claws and clip.

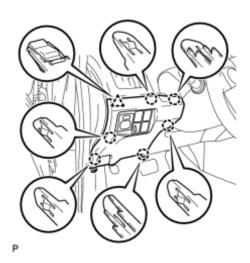



(e) Install the lower instrument panel finish panel assembly with the screw <*C*>.


- 22. INSTALL COWL SIDE TRIM SUB-ASSEMBLY LH
- 23. INSTALL FRONT DOOR SCUFF PLATE LH
- 24. INSTALL NAVIGATION RECEIVER WITH BRACKET (w/ Navigation System)
- 25. INSTALL RADIO RECEIVER WITH BRACKET (w/o Navigation System)
- 26. INSTALL UPPER INSTRUMENT PANEL FINISH PANEL SUB-ASSEMBLY

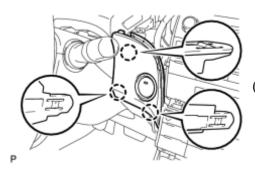


(a) Connect the connector.

- (b) Engage the 3 claws to install the upper instrument panel finish panel sub-assembly.
- 27. INSTALL INSTRUMENT CLUSTER FINISH PANEL GARNISH

- (a) Connect the connector.
- (b) Engage the 14 claws to install the instrument cluster finish panel garnish.

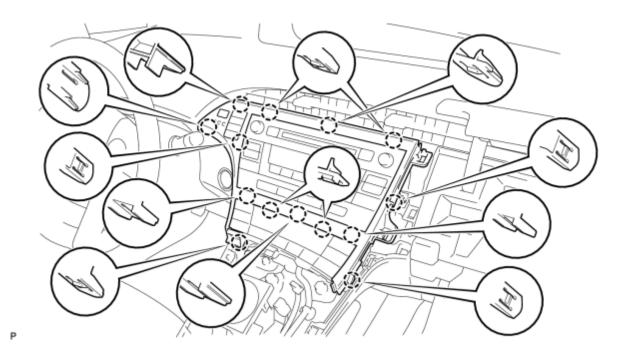


28. INSTALL INSTRUMENT PANEL CUP HOLDER ASSEMBLY




(a) Install the instrument panel cup holder with the 4 screws <C> to the lower center instrument cluster finish panel sub-assembly.

29. INSTALL LOWER CENTER INSTRUMENT CLUSTER FINISH PANEL SUB-ASSEMBLY

(a) Engage the 7 claws and 2 clips to install the lower center instrument cluster finish panel sub-assembly.

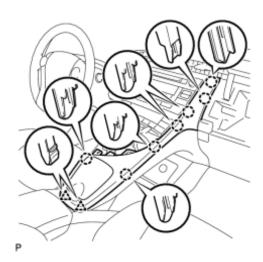

30. INSTALL INTEGRATION CONTROL AND PANEL ASSEMBLY

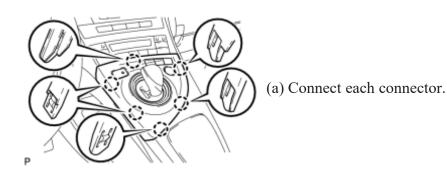

- (b) Engage the 6 claws to install the integration control and panel assembly.
- 31. CONNECT CABLE TO NEGATIVE BATTERY TERMINAL

NOTICE:

When disconnecting the cable, some systems need to be initialized after the cable is reconnected.

- 32. INSTALL REAR NO. 3 FLOOR BOARD
- 33. INSTALL REAR DECK FLOOR BOX
- 34. INSTALL REAR NO. 2 FLOOR BOARD (for Separate Type)
- 35. INSPECT SRS WARNING LIGHT
- (a) Inspect the SRS warning light **SRS**.